


# GE 251 PP LF

Immersion assembly

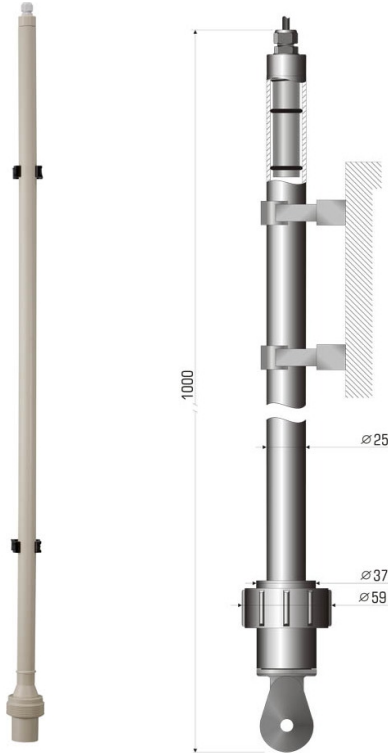

- Fitting head with cable gland
- Easy access to sensor
- Fastening with pipe clamps

## description

Immersion assembly for installation of the conductivity sensor IL 15 or LE 44 Pt 4 SCR CM

## technical data

### ambient conditions

temperature max. 90 °C

### mechanical construction

material PP  
dimensions see dimensional drawing

## order information

<u>name</u>	<u>description</u>	<u>article number</u>
GE 251 PP LF	Immersion assembly for IL 15 und LE 44 Pt	36164025K

