

GD 1 V(G) (PP)

Flow assembly

- Easy to dismantle
- Ideal for sensors with S8 screw plug (PG 13,5)
- Easy mounting by bonding or 1" female thread



description

Flow assembly for installation of one pH or ORP sensor in pipes with adhesive coupling or pipe coupling DN 25 with 1" female thread. Available in PVC and PP.

technical data

ambient conditions

max. pressure	PVC: 16 bar (at 20°C) PP: 10 bar (at 20°C)
temperature	max 40 °C (PVC) max. 90 °C (PP)


mechanical construction

material	PVC, PP
dimensions	see dimension drawing
installation	GD 1 V: adhesive coupling GD 1 VG (PP): pipe coupling DN 25 with 1" female thread



GD 1 V(G) (PP)

Flow assembly

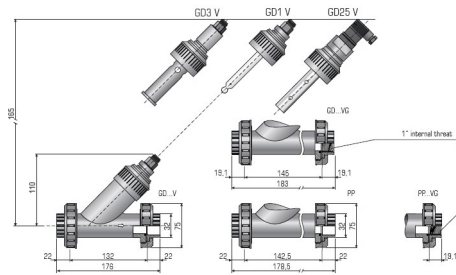

order information

<u>name</u>	<u>description</u>	<u>article number</u>
GD 1 V	adhesive coupling (DN 25), PVC	36604261K
GD 1 VG	pipe coupling (DN 25) with 1" internal thread, PVC	36604263K
GD 1 VG PP	pipe coupling (DN 25) with 1" internal thread, PP	36604265K

