


GE 23/3 PP

Immersion assembly

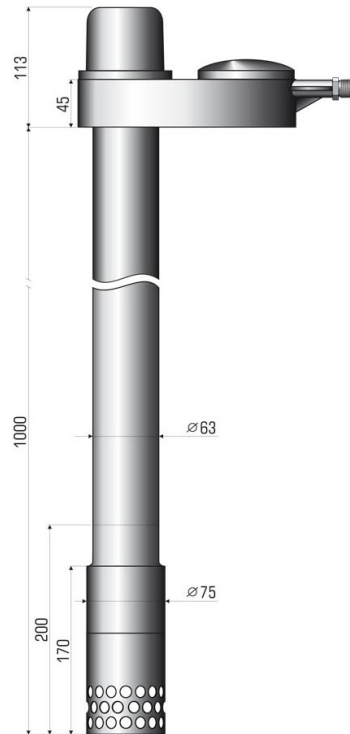

- Protection of the sensors by protective cage
- Easy fastening by pipe clamps or angle bracket
- Installation set for KCI-vessel available

description

Immersion assembly for max. 3 sensors (pH, ORP and/or temperature sensors) in tanks or basins.

technical data

ambient conditions

temperature max. 90°C

mechanical construction

material PP
dimensions see dimension drawing

order information

<u>name</u>	<u>description</u>	<u>article number</u>
GE 23/3 PP	for max. 3 sensors, PP	36510012K

accessories

accessories

Cap for GE 23/3 PP

KCI vessel set

Vessel-set KCI liquid-filled pH or ORP sensors. The installation is possible on wall or in the immersion assembly GE 23/3.

MW/MD GE 23/3 PP

Angle bracket for the immersion assembly GE 23/3

Moisture cap

Moisture cap for GE 23/3 PP

For a longer period pH- and ORP sensor shouldn't dry, the moisture cap avoid this.

Service-Set GE

PG screwing for sensors with 12 mm diameter. This screwing enables the installation of liquid-filled sensors in the immersion assembly GE 23/3 or in the flow assembly GD (1) VG and GD (3) VG.



GE 23/3 PP

Immersion assembly

VA-Pole for KCI-Bowl

For installation of KCI vessel in flow assembly GE 23/3

