


NA5PLUS - DIGITAL METER WITH BARGRAPH

- 3 or 7-colour bargraph with programmable colour switching over.
- Logging of the measured signal in programmed time intervals (800 samples).
- Universal measuring input.
- Programmable indication characteristic (21-point rescaling) and bargraph magnifier.
- Up to 8 programmable alarm outputs.
- Alarm triggered by the rate of change of the measured signal over time.
- Arithmetical functions x^2 , \sqrt{x} .
- Communication in SCADA systems (RS485/Modbus interfaces).
- Conversion of any measured value into a current or voltage analog signal.



EXAMPLE OF APPLICATION

Measurement of pressure in a pipeline.

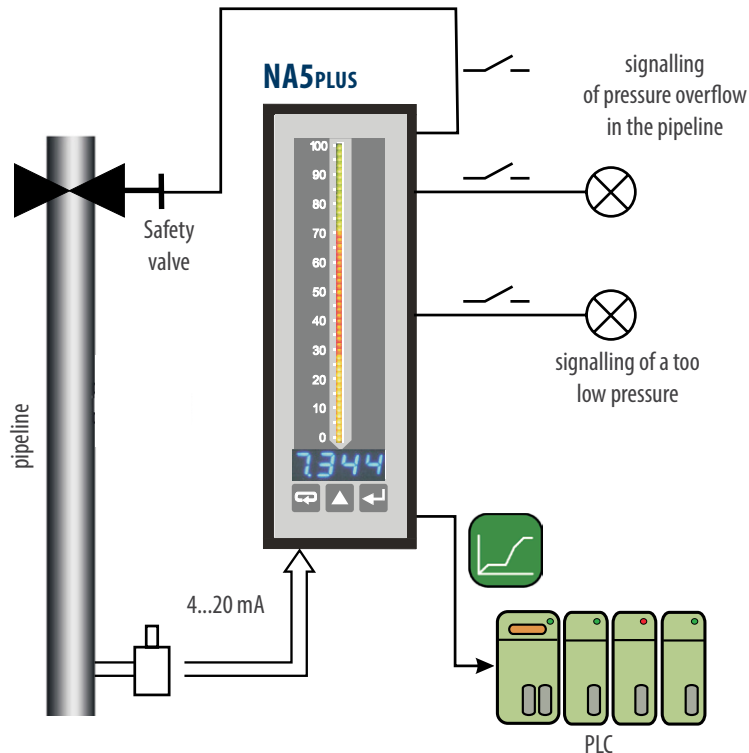

FEATURES	INPUTS	OUTPUTS	GALVANIC ISOLATION

TECHNICAL DATA

INPUTS

Input type	Measurement range	Basic error	Additional error
Pt100	-200...850°C	0.1%	compensation of temperature changes of reference welds $\leq \pm 1^\circ\text{C}$
Pt500	-200...850°C		
Pt1000	-200...850°C		
J (Fe-CuNi)	-100...1100°C		
K (NiCr-NiAl)	-100...1370°C		
N (NiCrSi-NiSi)	-100...1300°C	0.2%	compensation of cable resistance changes - when changing the resistance of wires $< 10\Omega$ the error is $\leq \pm 0.5^\circ\text{C}$
E (NiCr-CuNi)	-100...850°C		
R (PtRh13-Pt)	0...1760°C		
S (PtRh10-Pt)	0...1760°C	0.1%	- when changing the resistance of wires $< 20\Omega$ the error is $\leq \pm 1^\circ\text{C}$
T (Cu-CuNi)	-50...400°C		
Resistance	0...10 kΩ	0.1%	change in ambient temperature $\leq \pm 0.1\%$ of the range
Voltage	± 75 mV, $R_{imp.} > 100$ kΩ		
	± 300 mV, $R_{imp.} > 100$ kΩ $\pm 0...600$ V, $R_{imp.} > 3.5$ MΩ		
Current	± 40 mA, $R_{imp.} < 4$ Ω ± 5 A, $R_{imp.} = 10$ mΩ $\pm 10\%$		

Intensity of current flowing through the resistance thermometer: < 400 uA
Resistance of wires connecting the resistance thermometer with the meter: < 20 Ω/1 wire

OUTPUTS

Output type	Features
Current analog output	1 or 2 programmable 0/4...20 mA; load resistance ≤ 500 Ω
Voltage analog output	1 or 2 programmable 0-10 V; load resistance ≥ 500 Ω
Relay output	4 relays; NOC voltageless contacts, maximal load: - voltage: 250 V a.c., 150 V d.c. - current: 5 A 30 V d.c., 250 V a.c.
Open collector (OC) type	8 outputs of OC type: maximal load: - voltage: 5...30V d.c. - current: 25mA d.c.
Digital interface	interface type: RS-485; transmission protocol: MODBUS, RTU (8N2, 8E1, 8O1, 8N1) baud rate: 2400, 4800, 9600, 19200, 57600, 115200 b/s
Additional supply output	24 V d.c., maximal load 30 mA

EXTERNAL FEATURE

Readout field	4 - digits LED display	7-segment digits of 7 mm high, measuring range -1999...9999
	bargraph	bargraph of 100 mm length: - 55 segments in three-colour version - 28 segments in seven-colour version Bargraph resolution: programmable
Overall dimensions	48 x 144 x 100 mm	
Weight	< 0.4 kg	panel cut-out: 44+0.5 x 137.5+0.5 mm
Protection grade (acc. to EN 60529)	from frontal side: IP50	from terminal side: IP20


RATED OPERATING CONDITIONS

Supply voltage	95...253 V a.c. 40...400 Hz; 90...300 V d.c. 20...40 V a.c. 40...400 Hz, 20...60 V d.c.	power consumption ≤ 13 VA
Temperature	ambient: -10...23...55°C	storage: -25...85°C
Relative humidity	$< 95\%$	Condensation inadmissible

SAFETY AND COMPATIBILITY REQUIREMENTS

Electromagnetic compatibility	noise immunity	acc. to EN 61000-6-2
	noise emissions	acc. to EN 61000-6-4
Pollution grade	2	acc. to EN 61010-1
Installation category	III	
Maximal phase-to-earth operating voltage	• for input circuit: 600 V • for supply circuit: 300 V • for other circuits: 50 V	
Altitude above sea level	< 2000 m	

ELECTRICAL CONNECTIONS

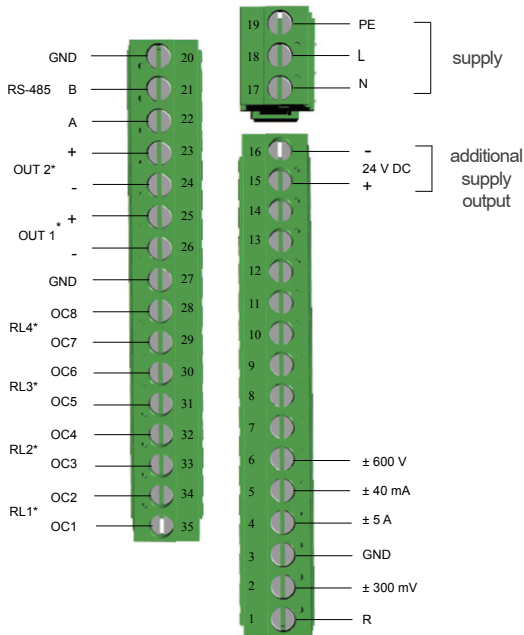

*-optional elements depend on the meter's version

Fig. 1 Description of the terminal strip.

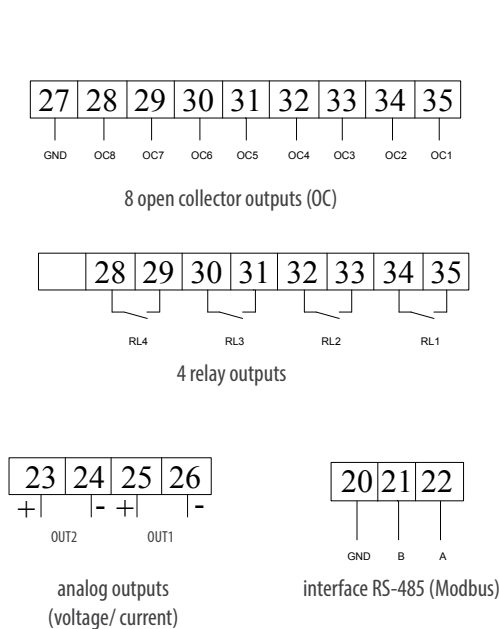






Fig.3. Connection way of output signals depending on the execution code.







Fig. 2 Connection way of input signals.

ORDERING

NA5PLUS -	X	X	X	X	X	X	X	XX	X	X
Bargraph colour:										
3-colour (R, G, R+G)	T									
7-colour (R, G, B, R+G, R+B, G+B, R+G+B)	M									
Display colour:										
red	R									
green	G									
custom-made*	X									
Input signal:										
universal input		U								
custom-made*		X								
Analog output:										
lack				0						
0/4...20mA				1						
0...10 V				2						
2 x 0/4...20 mA				3						
2 x 0...10 V				4						
1 x 0/4...20 mA, 1 x 0...10 V				5						
Additional output:										
lack				0						
4 relays				4						
8 outputs of OC type				8						
Supply voltage:										
95...253 V a.c./d.c.				2						
20...40 V a.c., 20...60 V d.c.				4						
Kind of terminals:										
screwed plug-in sockets				0						
Version:										
standard								00		
custom-made*								XX		
Language:										
Polish									P	
English									E	
other*									X	
Acceptance tests:										
without extra requirements										0
with an extra quality inspection certificate										1
acc. to customer's request										X

* - after agreeing with the manufacturer

Ordering example:

The code **NA5PLUS-TGU18200E0** means:

- NA5PLUS** - NA5PLUS meter
- T** - bargraph RG
- G** - green display colour
- U** - universal inputs
- 1** - current output 0/4...20 mA
- 8** - 8 outputs of OC type
- 2** - supply 95...253V a.c./ 90...300V d.c.
- 00** - standard version
- E** - english version
- 0** - without extra requirements

For more information about Lumel products
please visit our website:

www.lumel.com.pl



Join us at Facebook!



NA5Plus19_en



LUMEL
 EVERYTHING COUNTS

LUMEL S.A.

ul. Sulechowska 1, 65-022 Zielona Góra, POLAND
 tel.: +48 68 45 75 100, fax +48 68 45 75 508
 www.lumel.com.pl

Export department:

tel.: (+48 68) 45 75 139, 45 75 233, 45 75 321, 45 75 386
 fax.: (+48 68) 32 54 091
 e-mail: export@lumel.com.pl