

ND20 METER OF NETWORK PARAMETERS

FEATURES:



INPUT:



OUTPUTS:



GALVANIC ISOLATION:




Export department:
+48 68 45 75 139/321/368
Fax: +48 68 32 54 091
e-mail: export@lumel.com.pl

LUMEL S.A.
ul. Sulechowska1
65-022 Zielona Góra
POLAND
WWW.LUMEL.COM.PL



- Measurement of power network parameters in 2,3 or 4- wire balanced and unbalanced systems.
- High accuracy class.
- Indications considering values of programmed ratios.
- Harmonics of voltages and currents (selectively).
- THD factors for currents and voltages.
- Profile of 15, 30, 60-minutes' power (9000 measurements).
- Watt-hour meter for the selected harmonic.
- Backlit LCD 3.5" screen.
- Protection grade from the frontal side: IP65.
- Digital transmission to the master system through the RS-485 interface (MODBUS).
- Configurable analog, alarm and pulse outputs (energy).
- Configuration of displayed pages.

EXAMPLE OF APPLICATION

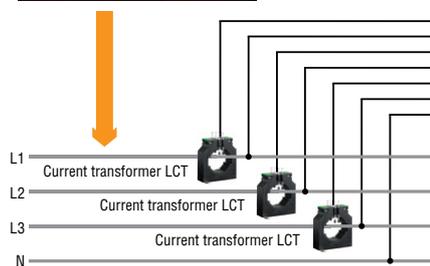

RS 485



Measurements, monitoring, recording of network parameters and energy.

MEASURED QUANTITIES AND MEASURING RANGES

| Measured value | Indication range* | Measuring range | L1 | L2 | L3 | Σ | Basic error |
|---|--|--|----|----|----|---|-------------|
| Current In 1 A 5 A | 0.00 ... 12 kA 0.00 ... 60 kA | 0.002 ... 1.200 A~ 0.010 ... 6.000 A~ | • | • | • | | ±0.2% r |
| Voltage L-N 57.7 V 69.3 V 230 V ** | 0.0 .. 318.0 kV 0.0 .. 382.5 kV 0.0 .. 1.269 MV | 2.8 ... 70.0 V~ 3.4..84 V~ 11.5 ... 276 V~ | • | • | • | | ±0.2% r |
| Voltage L-L 100 V 120 V 400 V ** | 0.0 ... 552.0 kV 0.0 .. 662.0 kV 0.0 ... 2.20 MV | 5 ... 120 V~ 6.0.. 144 V~ 20 ... 480 V~ | • | • | • | | ±0.5% r |
| Frequency | 47.0 ... 63.0 Hz | 47.0 ... 63.0 Hz | • | • | • | | ±0.2% mv |
| Active power | -9999 MW ... 0.00 W ... 9999 MW | -1.65 kW ... 1.4 W ... 1.65 kW | • | • | • | • | ±0.5% r |
| Reactive power | -9999 Mvar ... 0.00 var ... 9999 Mvar | -1.65 kvar ... 1.4 var ... 1.65 kvar | • | • | • | • | ±0.5% r |
| Apparent power | 0.00 VA ... 9999 MVA | 1.4 VA ... 1.65 kVA | • | • | • | • | ±0.5% r |
| Power factor PF | -1 ... 0 ... 1 | -1 ... 0 ... 1 | • | • | • | • | ±1% r |
| Tangent φ | -1.2...0...1.2 | -1.2 ... 0 ... 1.2 | • | • | • | • | ±1% r |
| Cosinus φ | -1... 1 | -1 ... 1 | • | • | • | • | ±1% r |
| φ | -180 ... 180 | -180 ... 180 | • | • | • | | ±0.5% r |
| Imported active energy | 0 ... 99 999 999.9 kWh | | | | | • | ±0.5% r |
| Exported active energy | 0 ... 99 999 999.9 kWh | | | | | • | ±0.5% r |
| Reactive inductive energy | 0 ... 99 999 999.9 kvarh | | | | | • | ±0.5% r |
| Reactive capacitive energy | 0 ... 99 999 999.9 kvarh | | | | | • | ±0.5% r |
| THD | 0 ... 100% | 0 ... 100% | • | • | • | | ±5% r |

* Depending on the set tr_U ratio (ratio of the voltage transformer: 0.1..4600.0) and tr_I ratio (ratio of the current transformer: 1...10000)

** available also other meter executions (see ordering code)

r - of the range mv - of the measured value

OUTPUTS

| Kind of output | Properties |
|---|--|
| Analog output | • 1 programmable current output 0/4...20 mA |
| Relay output | • programmable relay output, normally open voltageless contacts, load capacity 250 V~/0.5 A~ |
| Pulse output of active or reactive energy | • 1 OC type, passive |

DIGITAL INTERFACE

| Interface type | Transmission protocol | Mode | Baud rate |
|----------------|-----------------------|--------------------|-----------------------------|
| RS-485 | MODBUS RTU | 8N2, 8E1, 8O1, 8N1 | 4.8; 9.6; 19.2; 38.4 kbit/s |

EXTERNAL FEATURES

| | | |
|-------------------------------------|-------------------------|---|
| Readout field | LCD 3.5" screen, | specialized, monochromatic with backlight |
| Weight | < 0.3 kg | |
| Overall dimensions | 96 × 96 × 77 mm | panel cut-out: 92.5 ^{+0.6} × 92.5 ^{+0.6} mm |
| Protection grade (acc. to EN 60529) | from frontal side: IP65 | from terminal side: IP20 |


RATED OPERATING CONDITIONS

| | | |
|-------------------------------|--|---------------------------|
| Supply voltage | 85...253 V a.c., 90...300 V d.c., 20...40 V a.c., 20...60 V d.c. | |
| Temperature | ambient: -25...23...55°C | storage: -30...70°C |
| Relative humidity | 25...95% | inadmissible condensation |
| Operating position | any | |
| External magnetic field | 0...40...400 A/m | |
| Short duration overload (1 s) | voltage input: 2Un (max. 1000 V) | current input: 10 In |
| Power consumption | - in the supply circuit ≤ 6 VA, - in the voltage and current circuits ≤ 0.05 VA | |

SAFETY AND COMPATIBILITY REQUIREMENTS

| | | |
|--------------------------------|--|----------------------|
| Electromagnetic compatibility | noise immunity | acc. to EN 61000-6-2 |
| | noise emissions | acc. to EN 61000-6-4 |
| Isolation between circuits | basic | acc. to EN 61010-1 |
| Installation category | III | |
| Pollution level | 2 | |
| Maximal phase-to-earth voltage | - for supply and measuring circuits: 300 V - for other circuits: 50 V | |
| Altitude a.s.l. | < 2000m | |

ELECTRIC CONNECTIONS

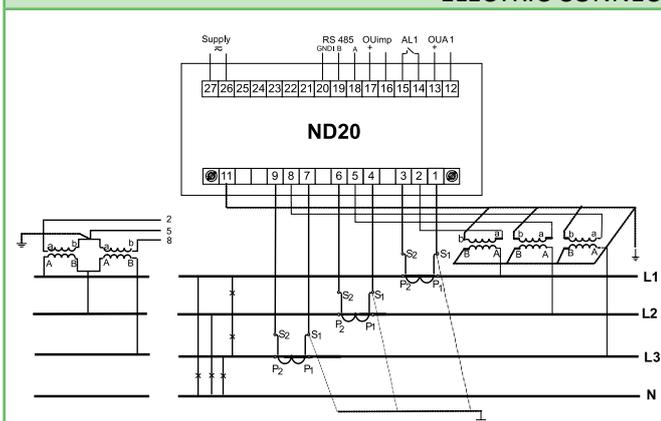

Connections:

- direct, semi-indirect and indirect one-phase measurement,
- direct measurement in a 3-wire network,
- semi-indirect measurement in a 3-wire network,
- indirect measurement with the use of 3 current transformers and 2 or 3 voltage transformers in a 3-wire network,
- direct measurement in a 4-wire network,
- semi-indirect measurement in a 4-wire network,
- indirect measurement with the use of 3 current transformers and 2 or 3 voltage transformers in a 4-wire network



Fig 1. Meter connection diagrams in a 4-wire network.

ORDERING

| | | | | | | | |
|--|----------|----------|----------|----------|-----------|-----------|----------|
| ANALYSER OF NETWORK PARAMETER ND20 | 2 | 2 | 1 | X | XX | X | X |
| Current input In: | | | | | | | |
| 1/5 A | | 2 | | | | | |
| Voltage input (phase/ phase-to-phase) Un: | | | | | | | |
| 3 x 57.7/100 V, 3 x 69.3/120 V, 3 x 230/400 V | | 2 | | | | | |
| Analog current output: | | | | | | | |
| with programmable output 0(4) ... 20 mA | | | 1 | | | | |
| Supply voltage: | | | | | | | |
| 85...253 V a.c., 90...300 V d.c. | | | 1 | | | | |
| 20...40 V a.c., 20...60 V d.c. | | | 2 | | | | |
| Version: | | | | | | | |
| standard | | | | | | 00 | |
| custom-made* | | | | | | XX | |
| Language: | | | | | | | |
| Polish/ English | | | | | | | M |
| Russian | | | | | | | R |
| other* | | | | | | | X |
| Acceptance tests: | | | | | | | |
| with an extra quality inspection certificate | | | | | | | 1 |
| with calibration certificate | | | | | | | 2 |
| acc. to customer's request* | | | | | | | X |

Wolf Process Automation Limited

Tel: +353 45 831575

Email: info@wpa.ie

Web: www.wpa.ie

EXAMPLE OF ORDER:

The code **ND20 221100M1** means:

- ND20** - meter of network parameters of ND20 type
- 2** - programmable current input ranges: 1 A or 5 A
- 2** - input voltage (phase/phase-to-phase)
Un = 3 x 57.7/100 V, 3 x 69.3/120 V, 3 x 230/400 V
- 1** - with programmable analog output
- 1** - supply voltage: 85...253 V a.c./ 90...300 V d.c.
- 00** - standard version
- M** - Polish/ English language version
- 1** - with extra quality inspection certificate.

* - after agreeing with the manufacturer

For more information about LUMEL's products please visit our website:
www.lumel.com.pl

Export department:
+48 68 45 75 139/321/368
Fax: +48 68 32 54 091
e-mail: export@lumel.com.pl

LUMEL S.A.
ul. Sulechowska 1
65-022 Zielona Góra
POLAND
WWW.LUMEL.COM.PL